



SLIDING SASH WOODEN WINDOW

Viking Window AS is an Estonian company which started the production of wood windows and exterior doors in 1997. Today the company has become one of the leading manufacturers of wood and aluminum clad windows and doors. Its products are highly valued on the international market. In addition to the United Kingdom and Ireland, Viking Window products are sold to Sweden, Norway, Denmark, Iceland, France and Japan. Viking Window is renowned for the high quality of the products, customer service and short lead times. All products are made to measure from environmentally friendly materials sourced sustainably.



Since 2000 Viking Window AS quality management system complies with the ISO 9001 standard. Since 2005 company's environmental management system complies with the ISO 14001 standard.

Since 2000 Viking Window AS quality management system complies with the ISO 9001 standard. Since 2005 company's environmental management system complies with the ISO 14001 standard.



The mark of responsible forestry

Since 2007, we have the FSC Chain of Custody certificate which proves that we use timber from responsibly managed forests.



In 2009 compliance to Norwegian Door and Window standards was certified.

Our production methods also comply with the British standard, BS 644.

The advantages of the Viking Windows:

- Traditional appearance and sleek design
- Excellent thermal performance
- Durability and ease of use
- Made to measure every time
- Delivered ready glazed and painted

Windows are fitted with torsion balance springs and with sash hooks on the bottom sash. Both sashes have a tilting facility for easy cleaning. There is also an option that the bottom sash is openable and the top sash is fixed.

Ogee mouldings are applied to the inside of the sash profiles. The top frame can be fitted with decorative horns on the outside.

The long life of the wood is guaranteed by the use of slow grown Scandinavian Pine and the GORI treatment system. Double glazed sealed units are argon filled, energy efficient, to maximize energy saving and noise reduction. For little extra we can improve the low U-value even more.

Anti solar and safety glass is available as an option.




Technical specification

Frame: 44 x 144 mm

Sash: 61 x 61 mm

- All profiles laminated pine A1-A3 high quality.
- All parts have been vacuum deep-impregnated with the GORI impregnation system.
- Maximum permitted mass for the sliding sash: 35 kg.
- Insulated glass unit: Double-glazed with low-E glass, the maximum U-value of the glass unit is 1.1 W/m²K.
- Hardware: Torso pre-tensioned balances, Caldwell Timb-A-Tilt hardware system.

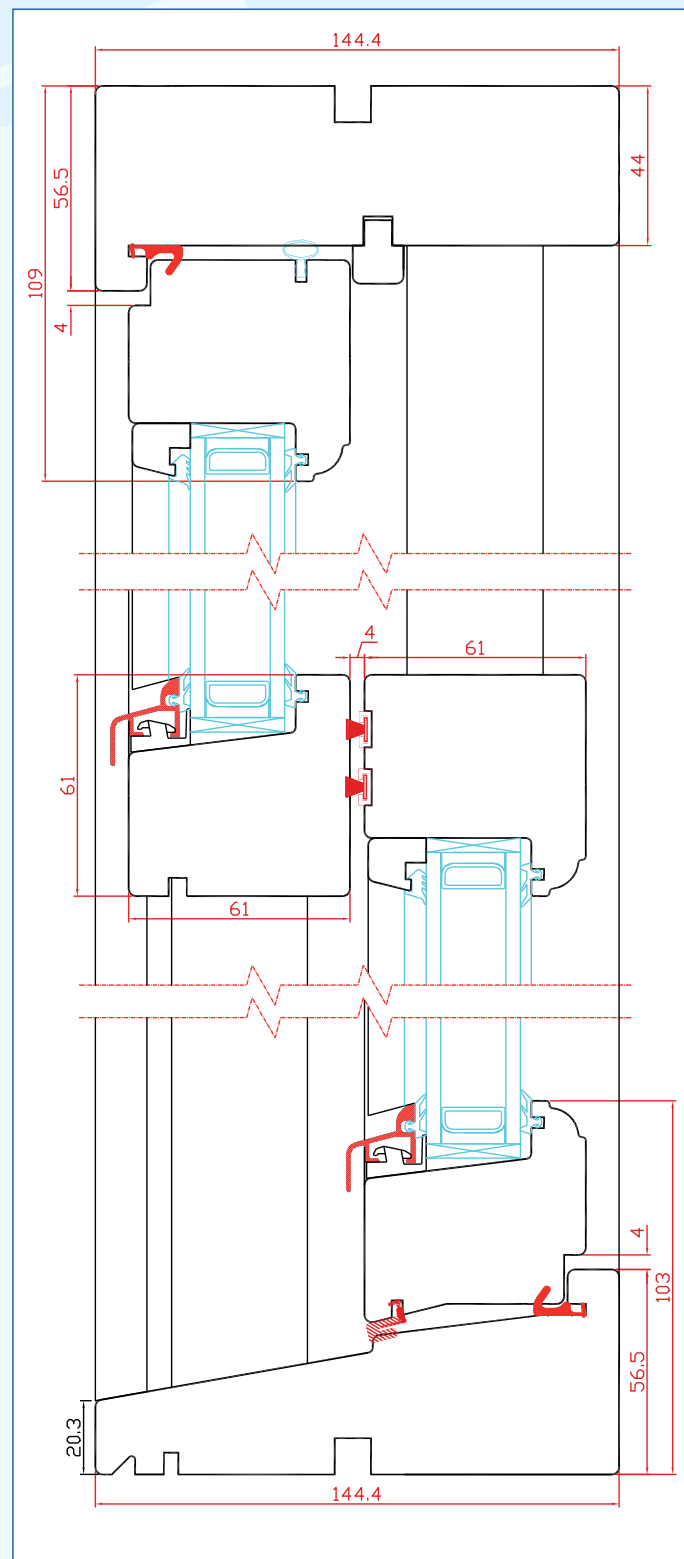

Warranty

All products come with a five year warranty.

www.vikingwindow.eu

HEAD OFFICE AND PRODUCTION
Mõo 72751 Järva County Estonia
Phone +372 384 8900
Fax +372 385 3027
e-mail: info@viking.ee
www.vikingwindow.eu